


ACOUSTICAL DATA	
Frequency bandwidth	40-500Hz
Type	Bass-Reflex
Max SPL at 1m	130dB (Peak)
Sensitivity	97dB / 1W / 1m
Directivity	Omnidirectionnal
Loudspeaker	12", neodymium

ELECTRICAL DATA	
Power handling	SA12-SW: 450W SA12-SWA: 1000W
Inputs	SA12-SW: Dual Speakon SA12-SWA: 2x XLR sym. 0dBV
Impedance	8 Ω
Amplification	SA12-SW: Compatible with MPA 6150 amplifier SA12-SWA: Digital amplifier Class D integrated
Electrical connection*	Neutrik Powercon, 195V - 250V AC 50-60Hz

*Only for SA12-SWA

MECHANICAL DATA	
Materials	Plywood
Dimensions (mm)	435 x 400 x 440
Weight (kg)	SA12-SW : 18.5 SA12-SWA : 19.8
Color	Black

TUNING AND EXPLOITATION	
Software	Supplied SAdrive software: filtering processor : UT26 with SUB option

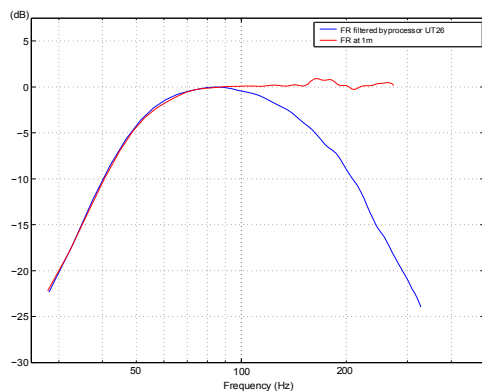

Frequency response at 1m

